RULLIERA ***DI CARICO***

PROFILE SUPPORTS




Structure in steel tubular con adjustable feet and PVC-coated steel rollers. 3.500 mm-long roller conveyors with 240 mm rollers, or 4.000 mm-long with 440 mm rollers. Unloading roller conveyors equipped with metric rod and measuring lock.

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY


Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

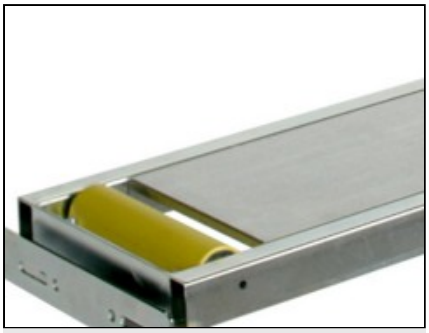

Side view

Through special steel bracket, the mechanical connection to the cutting machine is made precisely and rigidly.

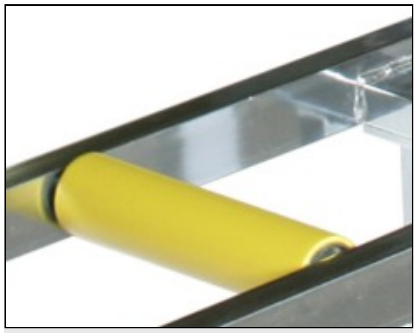

Roller

PVC-coated steel rollers of 240/440 mm that allow the profile to slide effectively, preventing surface damage.

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

RULLIERA DI CARICO / PROFILE SUPPORTS

CHARACTERISTICS

Maximum load capacity (according to model) - roller conveyor L=3500 mm, rollers L=240 mm (kg)	100
Maximum load capacity (according to model) - roller conveyor L=4000 mm, rollers L=440 mm (kg)	250

Included ● Available ○

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.