



# *Microbo*

Single Head Cutting-Off  
Machines




Stop gauge and profile support system, driven by DC motor, complete with electronic read-out through encoder.



### Side view

Through special steel bracket, the mechanical connection to the cutting machine is made precisely and rigidly.

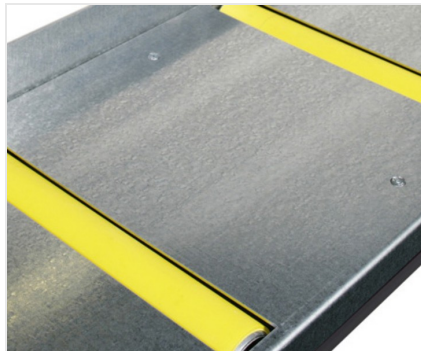

### Roller

PVC-coated steel rollers of 295 mm that allow the profile to slide effectively, preventing surface damage.



### Reference stop

Carriage running on ball bushing actuated by numerically controlled kinematics, which allows, referring to the centre of the blade, the realization of the length of the workpiece to be cut.



### Control

The control console allows total management of the machine's operational functions. Through the PCL tool, it is possible to perform the preparation of cutting lists, then allowing the repositioning of the stop sequentially and automatically.



### Barcode reader (Optional)

Through the use of the barcode reader, the system automatically identifies the structure and consequently positions the stop at the predetermined height, reducing cycle times.





**MICROBO / SINGLE HEAD CUTTING-OFF MACHINES**

**COMMAND FEATURES**

Backlit display	<input checked="" type="radio"/>
Perform single placements	<input checked="" type="radio"/>
Storage of 99 profile corrective values with measurement automatic calculation for angled cuts	<input checked="" type="radio"/>
Storage of 30 cutting lists (50 rows each) from keyboard	<input checked="" type="radio"/>
USB port	<input type="radio"/>
RJ45 network card	<input type="radio"/>

**MACHINE CHARACTERISTICS**

PVC-coated steel rollers (295) on bearings	<input checked="" type="radio"/>
Pneumatic lifting of workpiece stop	<input checked="" type="radio"/>
Effective stroke (according to model) (mm)	4.200 ; 7.200

Included ● Available ○