

Stack

Trolleys




Trolley dedicated to horizontal transportation and storage of cut profiles.

Emmegi S.p.A.
Via delle Industrie, 2
20044 - Arese (MI)
ITALY


Tel 39 02356961
P.IVA 01978870366
info@tekna.it
www.tekna.it

The right to make technical alterations is reserved.

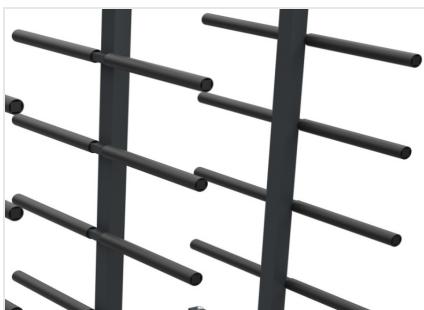

Contact surfaces

All contact surfaces are coated with soft nonslip PVC, which ensures the integrity of the surfaces in the housing stages.

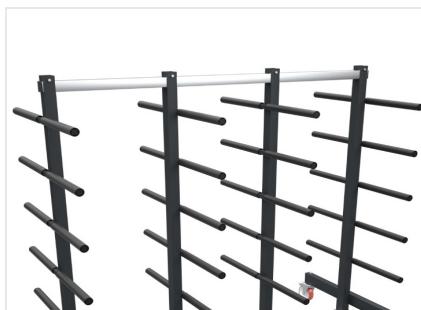

Adjustable centre supports

The adjustability of the centre supports allows extrusions of different lengths to be accommodated, facilitating their identification.



Pivoting wheels

Equipped with 4 pivoting wheels with brakes, they ensure a high degree of mobility and easy handling of the object. Locking the braking units allows their position to be fixed near different work areas.

STACK / TROLLEYS

CHARACTERISTICS

Soft PVC contact surface	●
Number of compartments	10
4 low-wear swivel casters, 2 of which with locking (mm)	Ø = 125
Adjustable centre supports	●
Length (mm)	1.800
Width (mm)	860
Height (mm)	1.950
Load capacity (kg)	500
Weight (kg)	55

Included ● Available ○