




## **TECHNICAL SHEET**

12/09/2025

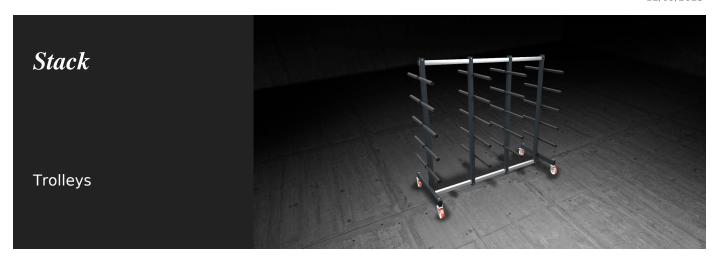

Trolley dedicated to horizontal transportation and storage of cut profiles.





### **TECHNICAL SHEET**

12/09/2025




#### **Contact surfaces**

All contact surfaces are coated with soft nonslip PVC, which ensures the integrity of the surfaces in the housing stages.



# Adjustable centre supports

The adjustability of the centre supports allows extrusions of different lengths to be accommodated, facilitating their identification.



### **Pivoting wheels**

Equipped with 4 pivoting wheels with brakes, they ensure a high degree of mobility and easy handling of the object. Locking the braking units allows their position to be fixed near different work areas.







### STACK / TROLLEYS

| CHARACTERISTICS   |         |
|---|---------|
| Soft PVC contact surface                                | •       |
| Number of compartments                                  | 10      |
| 4 low-wear swivel casters, 2 of which with locking (mm) | Ø = 125 |
| Adjustable centre supports                              | •       |
| Length (mm)   | 1.800   |
| Width (mm)  | 860     |
| Height (mm)   | 1.950   |
| Load capacity (kg)                                      | 500     |
| Weight (kg)   | 55      |

Included • Available O