



# **TKE 330 SA- MA**

Single Head Cutting-Off  
Machines




Troncatrice monotesta a lama ascendente prevista per tagli a 90°, 45° destro e sinistro ed angolazioni intermedie.



### Cutting zone

The sturdy cast-iron horizontal support surface, with its vertical square rigidly coupled to it, forms the workpiece clamping area, which features a large bearing area for optimum clamping of workpieces.

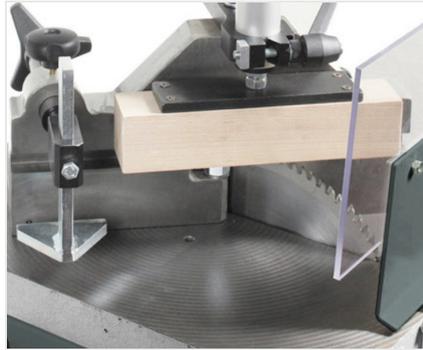

### Blade

The cutting-off machine is equipped with a 300-mm cemented carbide blade mounted on a manually actuated feed system.



### Vices

The machine is equipped with a horizontal and vertical vice assembly, which are pneumatically actuated in the S version, and manually actuated in the M version.





**TKE 330 SA-MA / SINGLE HEAD CUTTING-OFF MACHINES**

**BLADE**


Made of Widia (mm)

Ø = 300


**BLADE FEED**

Manual

**CUTTING DIAGRAM**

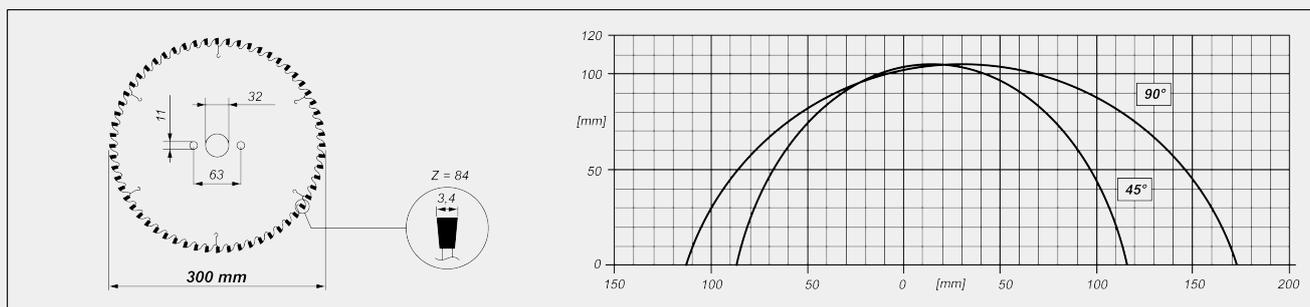

**CUTTING UNIT TILTING**

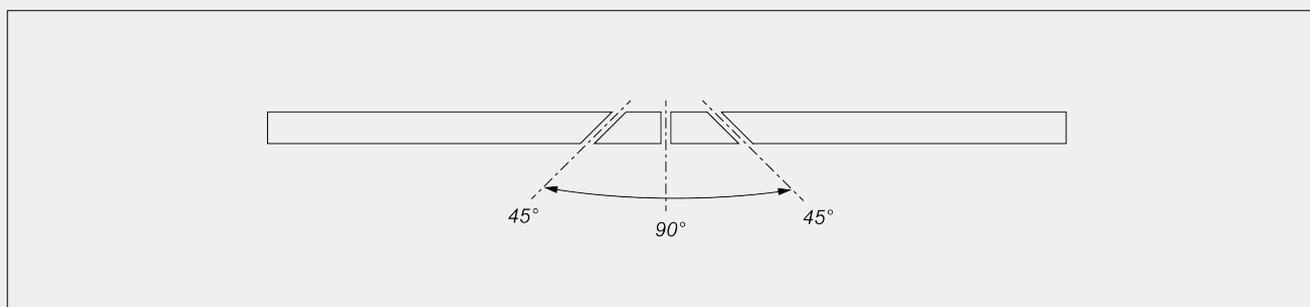

Mechanical adjustment of intermediate angles

**CUTTING AREA PROTECTION**

Local, manually controlled



**LUBRICATION SYSTEM**

Manual

**PROFILE POSITIONING**

Manual workpiece reference stop

**WORKPIECE LOCKING**

Manual or pneumatic vertical vice (according to model)

1

Horizontal manual vice

1

**MOTOR**

Three-phase brakemotor

Brake intervention time (s)

10

Power (kW)

1,5

Included  Available