




TKE 330 SA- MA

Single Head Cutting-Off
Machines




Troncatrice monotesta a lama ascendente prevista per tagli a 90°, 45° destro e sinistro ed angolazioni intermedie.

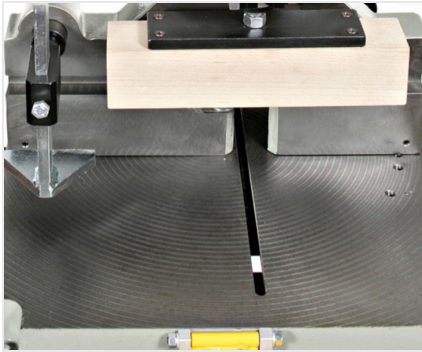


Cutting zone

The sturdy cast-iron horizontal support surface, with its vertical square rigidly coupled to it, forms the workpiece clamping area, which features a large bearing area for optimum clamping of workpieces.

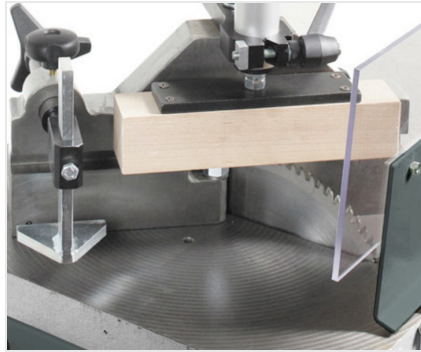

Blade

The cutting-off machine is equipped with a 300-mm cemented carbide blade mounted on a manually actuated feed system.

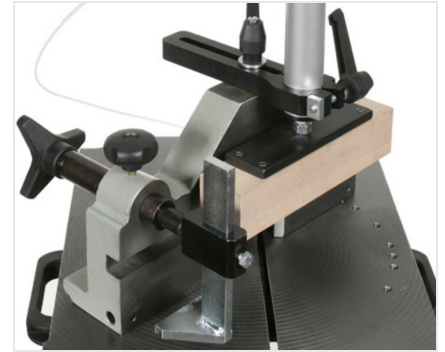

Vices

The machine is equipped with a horizontal and vertical vice assembly, which are pneumatically actuated in the S version, and manually actuated in the M version.





TKE 330 SA-MA / SINGLE HEAD CUTTING-OFF MACHINES

BLADE


Made of Widia (mm)

Ø = 300


BLADE FEED

Manual

CUTTING DIAGRAM

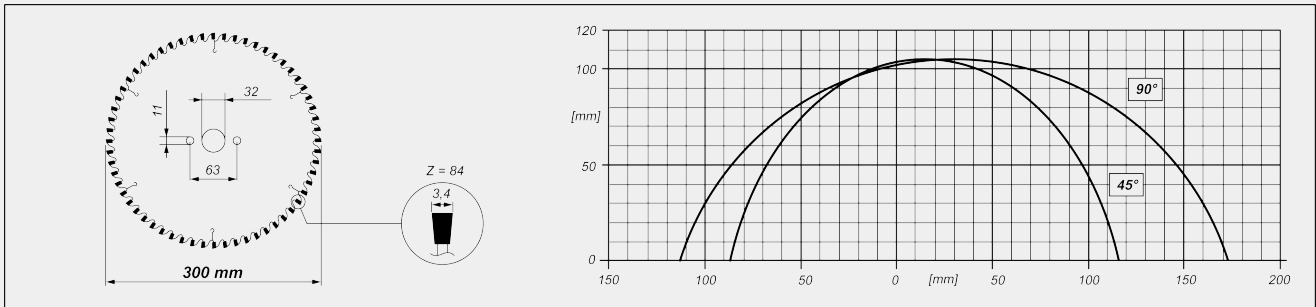

CUTTING UNIT TILTING

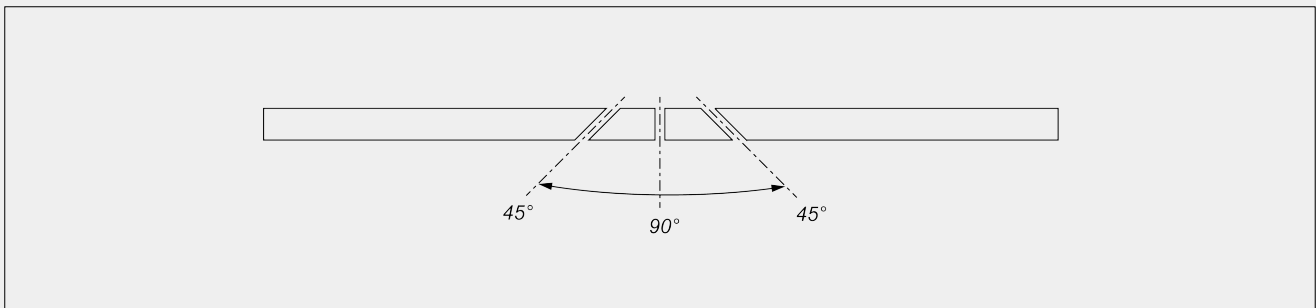

Mechanical adjustment of intermediate angles

CUTTING AREA PROTECTION

Local, manually controlled



LUBRICATION SYSTEM

Manual	●
--------	---

PROFILE POSITIONING

Manual workpiece reference stop	●
---------------------------------	---

WORKPIECE LOCKING

Manual or pneumatic vertical vice (according to model)	1
Horizontal manual vice	1

MOTOR

Three-phase brakemotor	●
Brake intervention time (s)	10
Power (kW)	1,5

Included ● Available ○