




TKE 330 SA-MA

Single Head Cutting-Off
Machines




Troncatrice monotesta a lama ascendente prevista per tagli a 90°, 45° destro e sinistro ed angolazioni intermedie.

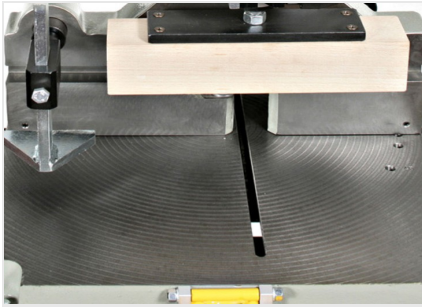

Cutting zone

The sturdy cast-iron horizontal support surface, with its vertical square rigidly coupled to it, forms the workpiece clamping area, which features a large bearing area for optimum clamping of workpieces.

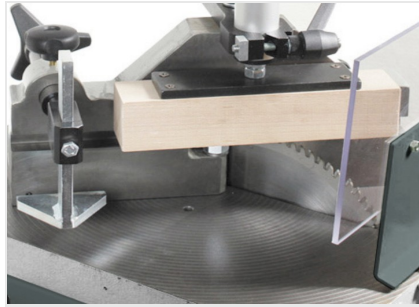

Blade

The cutting-off machine is equipped with a 300-mm cemented carbide blade mounted on a manually actuated feed system.



Vices

The machine is equipped with a horizontal and vertical vice assembly, which are pneumatically actuated in the S version, and manually actuated in the M version.



TKE 330 SA-MA / SINGLE HEAD CUTTING-OFF MACHINES

BLADE


Made of Widia (mm)

Ø = 300


BLADE FEED

Manual

CUTTING DIAGRAM

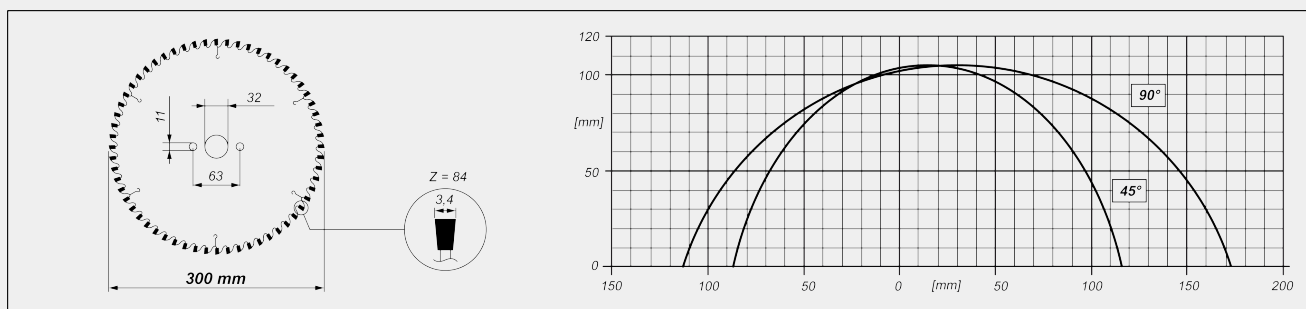

CUTTING UNIT TILTING

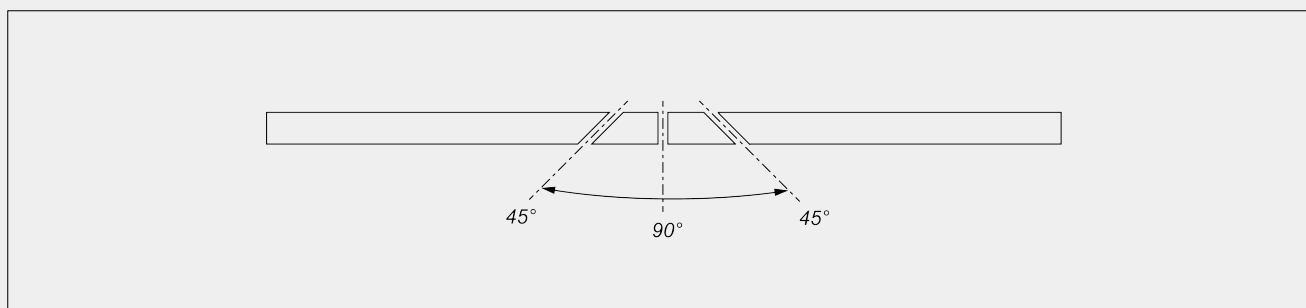

Mechanical adjustment of intermediate angles

CUTTING AREA PROTECTION

Local, manually controlled



LUBRICATION SYSTEM

Manual



PROFILE POSITIONING

Manual workpiece reference stop



WORKPIECE LOCKING

Manual or pneumatic vertical vice (according to model)

1

Horizontal manual vice

1

MOTOR

Three-phase brakemotor



Brake intervention time (s)

10

Power (kW)

1,5

Included ● Available ○