



TKE 340 PA

Single Head Cutting-Off
Machines




Single-head, rising blade cutting-off machine, with left loading side, able to perform cuts from 15° left to 15° right and intermediate angles.




Control

The control console allows user-friendly and intuitive machine operation. The practical lever with scale serves for rapid angular positioning of the blade. Instead, a further adjusting system allows adjustment of the vice pressure and blade outfeed rate.

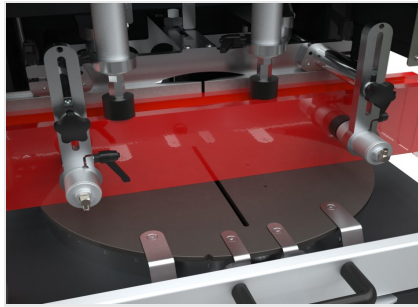

Vices

Thanks to the technical solutions adopted, the horizontal (optional for TKE 340 PA) and vertical vices ensure the utmost rigidity in workpiece clamping as well as rapid repositioning of the vices. Such characteristic allows the use of this machine in window/door manufacture.

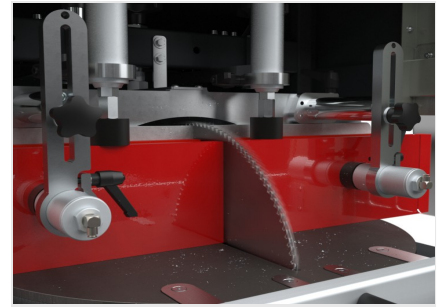

Cutting zone

The rugged horizontal work bench associated with the vertical striker allows optimum positioning of the workpiece to be cut, thus ensuring considerable accuracy of the cut surface.



Swarf drawer

A practical swarf drawer allows efficient collection of the processing debris thus ensuring clean conditions of the machine and work area.


**TKE 340 PA / SINGLE HEAD CUTTING-OFF MACHINES****BLADE**

Made of Widia (mm)

Ø = 400

BLADE FEED

Pneumatic

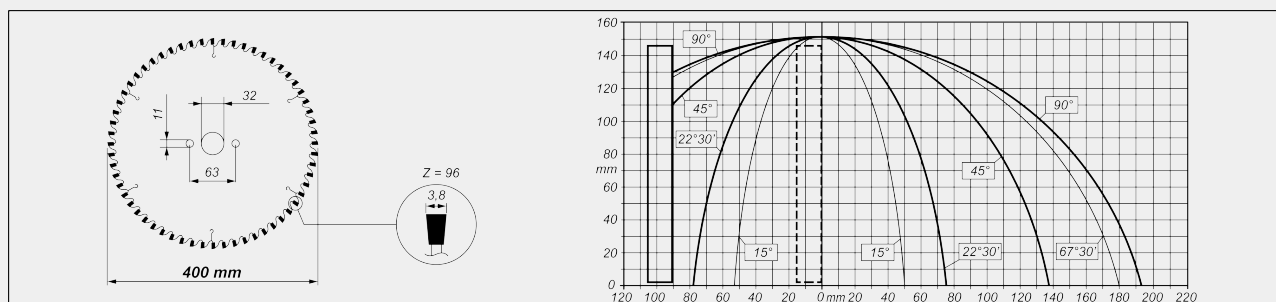CUTTING DIAGRAM**CUTTING UNIT TILTING**

Mechanical adjustment of intermediate angles

CUTTING AREA PROTECTION

Full guard manually operated

LUBRICATION SYSTEM

Spray-mist lubrication with oil emulsion

WORKPIECE LOCKING

Pair of pneumatic vertical vices

Optional additional horizontal vices

2

MOTOR

Three-phase (without brake)

Power (kW)

1,5

Rpm

2.800



Included ● Available ○



Emmegi S.p.A.
Via delle Industrie, 2
20044 - Arese (MI)
ITALY

Tel 39 02356961
P.IVA 01978870366
info@tekna.it
www.tekna.it

The right to make technical alterations is reserved.