V-LINK

VERTICAL ROLLERS



Vertical roller conveyor for easy transport of frames and fenestration products including very heavy ones between the various assembly stations.

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY


Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.




Roller conveyor

A roller conveyor at the base, with adjustable height from 320 to 360 mm from the ground, supports the weight of the door and ensures smoothness and ease of handling.

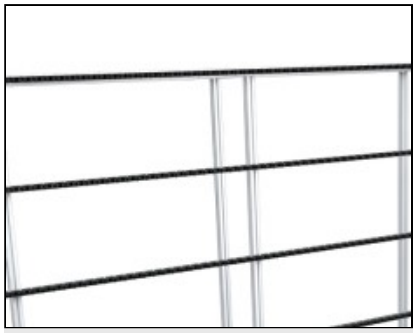

Bench with anti-scratch rollers

Five rows of stem-mounted needle rollers form the support of the door against the inclined backrest and allow even very heavy doors to be moved safely.

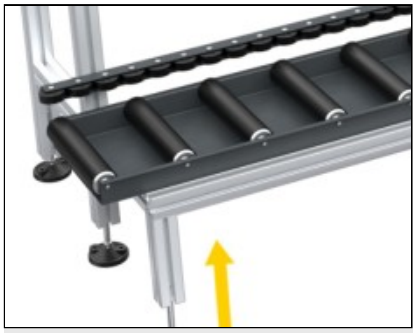

Adjustable feet

The height-adjustable feet ensure that the desired height of the work surface is correctly achieved and allow for a variable angle from 85° to 90°. The feet also have holes so they can be anchored to the floor.

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

V-LINK / VERTICAL ROLLERS

CHARACTERISTICS	
Roller bench height (mm)	320 ÷ 360
Adjustable roller bench tilt	85° ÷ 90°
Weight (kg)	100
Load capacity (kg)	200
Length (mm)	3.000
Height (mm)	2.165 ÷ 3.015
Width (mm)	870
Soft nonslip PVC contact surface	●

Included ● Available ○

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.